

CE RoHS EMC



EV-MTX510B


Rated voltage: AC100-250V, 50/60Hz
Rated power: 50W
Beam Angle : 2°
Light source: 10W X 5pcs CREE WW LED, 50000 hrs Rated
DMX 512 Channels: 1/2/4/5/7/9 channels selectable
Dimmer: 0-100% linearly dimming,

Refresh Frequency: 1000Hz, no blink when camera shooting;
Shutter: independent electronic strobe ;
Control Mode:
Standard DMX512, 3 pin interfaces ;

Master/slave mode, no need to set up the master and slave manually, will receive the main engine data automatically ;
Other Functions:
Sound active mode and auto-run mode ;
Work Environment Temperature : -20° C ~ 40° C ;
Waterproof Grade: IP20
Dimension: 600X145X161mm
Weight: 3.5 Kgs



DIMENSION

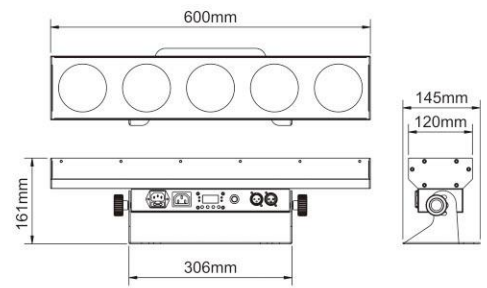

CE RoHS EMC



EV-MTX16-2

Rated voltage: AC100-250V, 50/60Hz
Rated power: 250W
The Angle : 60°
Light source: 15W X 16pcs RGB three in one LED, 50000 hrs Rated
DMX 512 Channels: 1/3/4/5/6/12/24/48/50 channels selectable
Dimmer: 0-100% linearly dimming,

Refresh Frequency: 1000Hz, no blink when camera shooting;
Shutter: independent electronic strobe ;
Control Mode:
Standard DMX512, 3 pin interfaces ;

Master/slave mode,

Other Functions:
Sound active mode and auto-run mode ;
Work Environment Temperature : -20° C ~ 40° C ;
Waterproof Grade: IP20
Dimension: 1700X120X188mm
Weight: 12.5 Kgs



DIMENSION

