

CE RoHS EMC



## EV-MTX510B


Rated voltage: AC100-250V, 50/60Hz  
Rated power: 50W  
Beam Angle: 2°  
Light source: 10W X 5pcs CREE WW LED, 50000 hrs Rated  
DMX 512 Channels: 1/2/4/5/7/9 channels selectable  
Dimmer: 0-100% linearly dimming,

Refresh Frequency: 1000Hz, no blink when camera shooting;  
Shutter: independent electronic strobe;  
Control Mode:  
Standard DMX512, 3 pin interfaces;

Master/slave mode, no need to set up the master and slave manually, will receive the main engine data automatically;  
Other Functions:  
Sound active mode and auto-run mode;  
Work Environment Temperature: -20° C ~ 40° C;  
Waterproof Grade: IP20  
Dimension: 600X145X161mm  
Weight: 3.5 Kgs



### DIMENSION

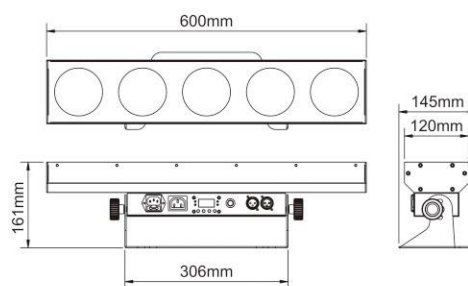

CE RoHS EMC



## EV-MTX16-2

Rated voltage: AC100-250V, 50/60Hz  
Rated power: 250W  
The Angle: 60°  
Light source: 15W X 16pcs RGB three in one LED, 50000 hrs Rated  
DMX 512 Channels: 1/3/4/5/6/12/24/48/50 channels selectable  
Dimmer: 0-100% linearly dimming,

Refresh Frequency: 1000Hz, no blink when camera shooting;  
Shutter: independent electronic strobe;  
Control Mode:  
Standard DMX512, 3 pin interfaces;

Master/slave mode,

Other Functions:  
Sound active mode and auto-run mode;  
Work Environment Temperature: -20° C ~ 40° C;  
Waterproof Grade: IP20  
Dimension: 1700X120X188mm  
Weight: 12.5 Kgs



### DIMENSION

